

ART. 5588 / 9305

Dado antifurto

last edit 30/05/2019

DRAWING N. 1004


ART. 5588 / 9305

Security nut / Shear nut / Break off nut

Disponibile / Available

A2 

LA QUOTA "ØC" È SUBORDINATA AL PUNTO DI ROTTURA CHE DEVE ESSERE RISPETTATO  
 THE QUOTE "ØC" IS SUBORDINATE ON THE BREAK POINT THAT MUST BE RESPECTED

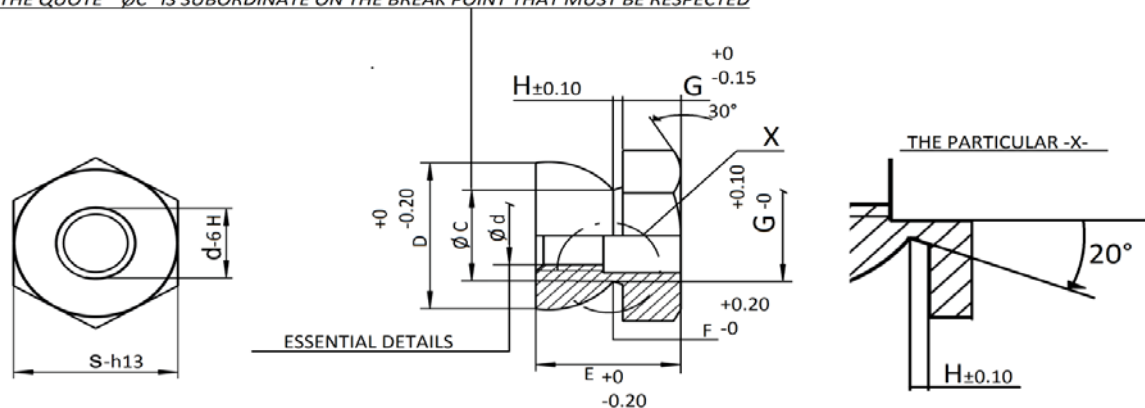

d	M6	M8		M10		M12	M16
S	10	13	17	17	19	19	24
H	1		1,5		1,5	1,5	1,5
E	9,5	12	14	15		15	20,5
G	3,5	4	6	5		5	7
D	9,8	12,8	17	16,8	18,8	18,8	23,8
F	4	6	7	7,5		7,5	8,5
Ød.nom	5,00	6,75		8,50		10,50	14,30
Ød.min.	4,91	6,64		8,37		10,35	14,15
Ød.max	5,15	6,91		8,67		10,65	14,45
PUNTO DI ROTTURA / BREAK POINT - NEWTON/mm <sup>2</sup>							
N/mm <sup>2</sup>	From 7 to 10	From 15 to 25		from 30 to 40		from 35 to 45	from 45 to 55