


ART. 9603

Gomiti 45° F/F, aisi 316 / A4

*Elbows 45° F/F, aisi 316 / A4*

Esecuzione: Microfusione

*Execution: Microcasting*

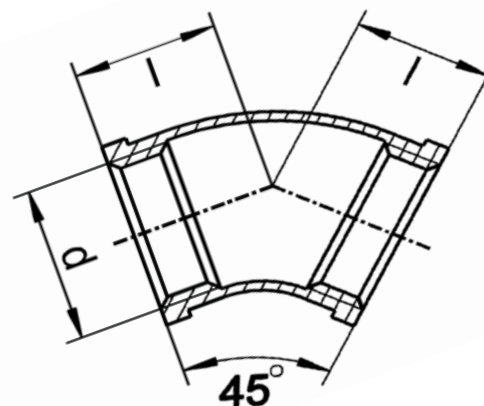

Codice Articolo <i>Item Number</i>	M <i>size</i>	DN/ID	l <i>(mm)</i>	Box	Master carton
9603-4-1/8	1/8"	6	17,7	5	/
9603-4-1/4	1/4"	8	18,6	5	/
9603-4-3/8	3/8"	10	20,5	5	/
9603-4-1/2	1/2"	15	22,5	5	200
9603-4-3/4	3/4"	20	25	5	/
9603-4-1	1"	25	28,2	5	/
9603-4-1-1/4	1"1/4	32	32,2	5	/
9603-4-1-1/2	1"1/2	40	36	5	/
9603-4-2	2"	50	42	2	/
9603-4-2-1/2	2"1/2	65	47	1	/
9603-4-3	3"	80	52	1	/
9603-4-4	4"	100	63	1	/

Filettatura: conforme a EN 10226-1 (EX ISO 7-1)

(filetto maschio conico, filetto femmina cilindrico)

Conicità 1:16 sul diametro

Angolo del filetto 55°

Pressione massima d'esercizio 150 lbs (Libbre) = 10,34 BAR PN10

*Thread: according to EN 10226-1 (EX ISO 7-1)*

*(conical male thread, cylindric female thread)*

*Taper 1:16 on diameter*

*Angle of threads 55°*

*Maximum operating pressure 150 lbs = 10,34 Bar PN 10*