

# DIN 7985 Z sim. UNI 7687Z ISO 7045Z

Vite a testa cilindrica bombata con impronta croce Z (Pozi)

Cross recessed Z (Pozi) pan head screw



Disponibile/Available :



A2



A4

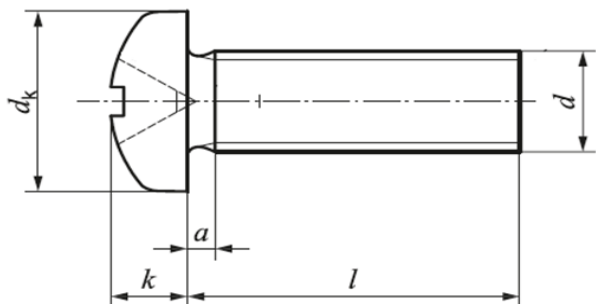

|              |              |        |      |      |      |      |      |       |       |      |
|--------------|--------------|--------|------|------|------|------|------|-------|-------|------|
| $p^*$        |              | 0,35   | 0,4  | 0,45 | 0,5  | 0,7  | 0,8  | 1,0   | 1,25  |      |
| $a$ max.     |              | 0,7    | 0,8  | 0,9  | 1    | 1,4  | 1,6  | 2     | 2,5   |      |
| $dk$         | nom.= max.   | 3,2    | 4,0  | 5,0  | 6    | 8,00 | 10   | 12,00 | 16,00 |      |
|              | min.         | 2,9    | 3,7  | 4,7  | 5,7  | 7,64 | 9,64 | 11,57 | 15,57 |      |
| $k$          | Nominal Size | 1,3    | 1,6  | 2,00 | 2,40 | 3,1  | 3,8  | 4,6   | 6     |      |
|              | max.         | 1,42   | 1,72 | 2,18 | 2,52 | 3,25 | 3,95 | 4,75  | 6,15  |      |
|              | min.         | 1,18   | 1,48 | 1,88 | 2,28 | 2,95 | 3,65 | 4,45  | 5,85  |      |
| Cross recess | $Recess$     | $no.$  | 0    | 1    |      |      | 2    |       | 3     | 4    |
|              | $m$          | $ref.$ | 1,8  | 2,4  | 2,6  | 3    | 4,3  | 5     | 6,7   | 8,8  |
|              | Type Z       | $max.$ | 0,92 | 1,1  | 1,27 | 1,68 | 1,9  | 2,64  | 3,02  | 4,06 |
|              | penetration  | $min.$ | 1,17 | 1,35 | 1,52 | 1,93 | 2,36 | 3,1   | 3,48  | 4,52 |
| $d$          |              | M1,6   | M2   | M2,5 | M3   | M4   | M5   | M6    | M8    |      |

\*  $P$  è il passo del filetto

\*  $P$  is the pitch of the thread.

last edit 24/07/2019

pag.1/2

DRAWING N. 1092

| <i>l/d</i> | M1,6 | M2   | M2,5   | M3   | M4   | M5   | M6   | M8   |
|------------|------|------|--------|------|------|------|------|------|
| 2          | /    | /    |        |      |      |      |      |      |
| 3          | /    | 2x3  | /      |      |      |      |      |      |
| 4          | /    | 2x4  | 2,5x4  | /    |      |      |      |      |
| 5          | /    | 2x5  | 2,5x5  | 3x5  | 4x5  |      |      |      |
| 6          | /    | 2x6  | 2,5x6  | 3x6  | 4x6  | 5x6  |      |      |
| 8          | /    | 2x8  | 2,5x8  | 3x8  | 4x8  | 5x8  | 6x8  |      |
| 10         | /    | 2x10 | 2,5x10 | 3x10 | 4x10 | 5x10 | 6x10 | 8x10 |
| 12         | /    | /    | 2,5x12 | 3x12 | 4x12 | 5x12 | 6x12 | 8x12 |
| (14)       | /    | /    | 2,5x14 | 3x14 | 4x14 | 5x14 | 6x14 | /    |
| 16         | /    | /    | 2,5x16 | 3x16 | 4x16 | 5x16 | 6x16 | 8x16 |
| (18)       |      | /    | 2,5x18 | 3x18 | 4x18 | 5x18 | 6x18 | /    |
| 20         |      | /    | /      | 3x20 | 4x20 | 5x20 | 6x20 | 8x20 |
| (22)       |      |      | /      | 3x22 | 4x22 | 5x22 | /    | /    |
| 25         |      |      | /      | 3x25 | 4x25 | 5x25 | 6x25 | 8x25 |
| (28)       |      |      | /      | /    | /    | /    | /    | /    |
| 30         |      |      | /      | 3x30 | 4x30 | 5x30 | 6x30 | 8x30 |
| 35         |      |      |        | 3x35 | 4x35 | 5x35 | 6x35 | 8x35 |
| 40         |      |      |        | 3x40 | 4x40 | 5x40 | 6x40 | 8x40 |
| 45         |      |      |        |      | 4x45 | 5x45 | 6x45 | 8x50 |
| 50         |      |      |        |      | 4x50 | 5x50 | 6x50 | 8x50 |
| 55         |      |      |        |      | 4x55 | 5x55 | 6x55 | /    |
| 60         |      |      |        |      | 4x60 | 5x60 | 6x60 | 8x60 |
| 70         |      |      |        |      |      | 5x70 | 6x70 | 8x70 |
| 80         |      |      |        |      |      | 5x80 | 6x80 | 8x80 |
| 90         |      |      |        |      |      |      | 6x90 | 8x90 |

Le lunghezze tra parentesi sono sconsigliate  
*Sizes in parentheses should be avoided if possible.*

Le lunghezze standard sono quelle tra le due linee in grassetto.  
*The range of commercial lengths is between the bold stepped lines.*